

IC

SERIES



**Solid Red** - Charger Fault.  
See display panel for details.



**Solid Blue** - AC power available.



**Flashing Amber** - Caution. External error condition. See display panel for details.




**Flashing Green** - Low state of charge.  
**Solid Green** - High state of charge.



**Flashing Green** - USB port active.  
**Solid Green** - Safe to remove USB flash drive.



**Flashing Green** - High state of charge.  
**Solid Green** - Charge complete.

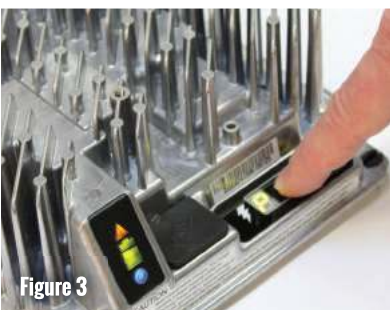

## Selecting a Charge Profile

- 1 Disconnect AC input from the charger, or from the wall outlet. Wait 30 seconds for the input relay to open. (See Figure 1)
- 2 While reconnecting AC input, press and hold the Select Charge Profile Button. Hold the button until Error Indicator is on and Battery Charging Indicator starts flashing.
- 3 Press and release the Select Charge Profile Button to advance through charging profiles loaded on the charger. The selected charging profile will be displayed up to three times (e.g. "P-0-1" for Profile 11). (See Figure 2)
- 4 Once desired charging profile is displayed, press and hold button for 10 seconds to confirm selection and exit Profile Selection Mode. (See Figure 3)
- 5 Press the Select Charge Profile Button to check that the desired profile is selected.

For more information, visit the Delta-Q support page:  
[www.delta-q.com/support/](http://www.delta-q.com/support/)